


# Wireless Transparent Modules Datasheet

## 32001520

OOK/ASK 434 MHz SUPERHETERODYNE RECEIVER

## Datasheet

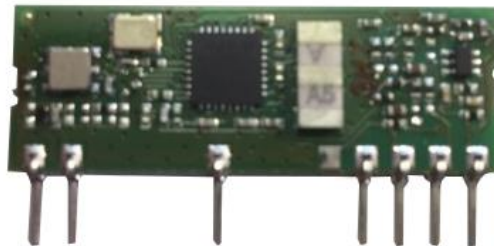

### Overview

High performance Superheterodyne OOK/ASK receiver with low profile and height in the 434 MHz SRD band.

---

## Contents

1.	Product Features.....	3
2.	Mechanical Dimensions.....	4
3.	Pin Definition.....	4
4.	Electrical characteristics.....	5
4.1	Absolute Maximum Ratings.....	5
4.2	Operating Condition.....	5
4.2.1	Notes.....	6
5.	Temperature Range Curves.....	7
6.	Application Notes.....	8
7.	Regulatory Approvals.....	8
8.	Revision History.....	8

## I. Product Features

### Mechanical highlights:

- ✓ Compact dimensions  
(35.50 mm x 13.50 mm)

### RF performances:

- ✓ -111 dBm Sensitivity
- ✓ Category 1.5 Receiver

### Additional features:

- ✓ RSSI output pin
- ✓ Front End filter

### Applications:

- ✓ Remote control systems
- ✓ Data transmission
- ✓ Industrial controls
- ✓ Home automation

This module is equipped with a differential image rejection mixer for a good out of band interference immunity.

Thanks to an efficient embedded noise cancellation filter, this receiver reaches a good noise reduction of the received signal, providing excellent performances.


Suitable for all HCS, HT12 encodings and similar.

Standard supply voltage range from 4.5 V to 5.5 V. The module meets all the requirements in the industrial temperature range -40 / +85 °C.

**CATEGORY 1.5 RECEIVER** developed according to ETSI EN 300 220 European Standard. The module meets the Radio Equipment Directive (RED) 2014/53/EU.

Compliant with REACH and RoHS directives.

## 2. Mechanical Dimensions

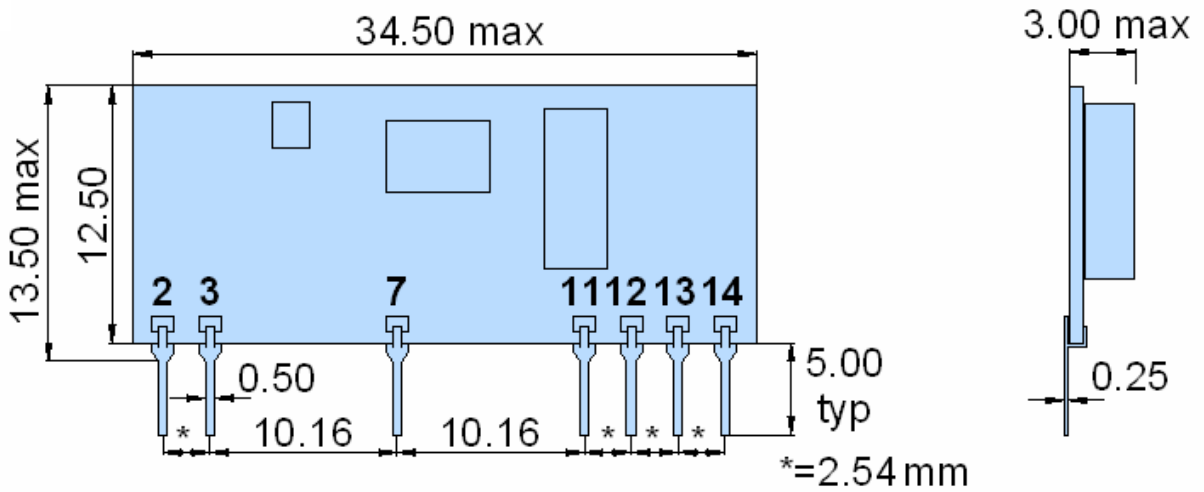

## 3. Pin Definition

Pin	Name	Type
2	GND	S
4	RF Input (50 Ω)	RF
7	GND	S
11	GND	S
12	+ VCC	S
13	RSSI Out	O
14	Data OUT	O

**LEGEND:** S = Power supply, O = Output, I = Input, RF = Antenna port, NC = Do Not Connect

## 4. Electrical Characteristics

### 4.1 Absolute Maximum Ratings

Parameter	Max.	Unit
Supply Voltage (VCC)	+6.0	V
Output pins voltage with respect to GND	VCC	V
Radio Frequency Input, pin 1:	10	dBm
Storage Temperature	-40 ÷ 100	°C
Operating Temperature	-40 ÷ 85	°C

### 4.2 Operating Condition

**Note:** All RF parameters measured with input (pin 1) connected to a 50  $\Omega$  impedance signal source or load.

#### GENERAL ELECTRICAL CHARACTERISTICS @ 25 °C

Parameter	Min.	Typ.	Max.	Unit	Notes
Supply Voltage (VDD)	4.5	-	5.5	V	
DC Current drain	-	5.7		mA	1,4
Operating Frequency	-	433.92	-	MHz	
Channel Frequency Precision	-	±30	-	kHz	
Sensitivity	-	-110	-	dBm	2,3
-3 dB RF Bandwidth	-	-	300	kHz	
Spurious response rejection	-	-5	-	dBm	5
Spurious radiated level	-	-	-57	dBm	
Start-up time	-	60	170	ms	6
Settling time	-	-	5	ms	7
Data Rate	300	-	4800	bit/s	
Output Logic low	GND	-	0.4	V	
Output Logic high	VCC - 0.4	-	VCC	V	

#### 4.2.1 Notes:

**Note 1:** VCC = 5.0 V.

**Note 2:** All RF parameters measured with input (pin 1, RF Input) connected to 50  $\Omega$  impedance signal source or load.

**Note 3:** Pseudo random code NRZ, OOK BER (bit error rate) = 0.1 % or better, OOK modulation, Bit Rate = 2400 bit/s.

**Note 4:** Typical consumption is measured with -100 dBm OOK 1.2 kHz square modulated signal.


**Note 5:** Spurious response rejection, given for a single tone interferer and referenced to sensitivity + 6 dB, test performed with unmodulated signal measured as per ETSI 300 220-1.

**Note 6:** Time by power-on to valid data reception.

**Note 7:** Time by test signal at RF input to valid data reception.

## 5 Temperature Range Curves

**Note:** All RF parameters measured with input (pin 1) connected to a 50 Ω impedance signal source or load.

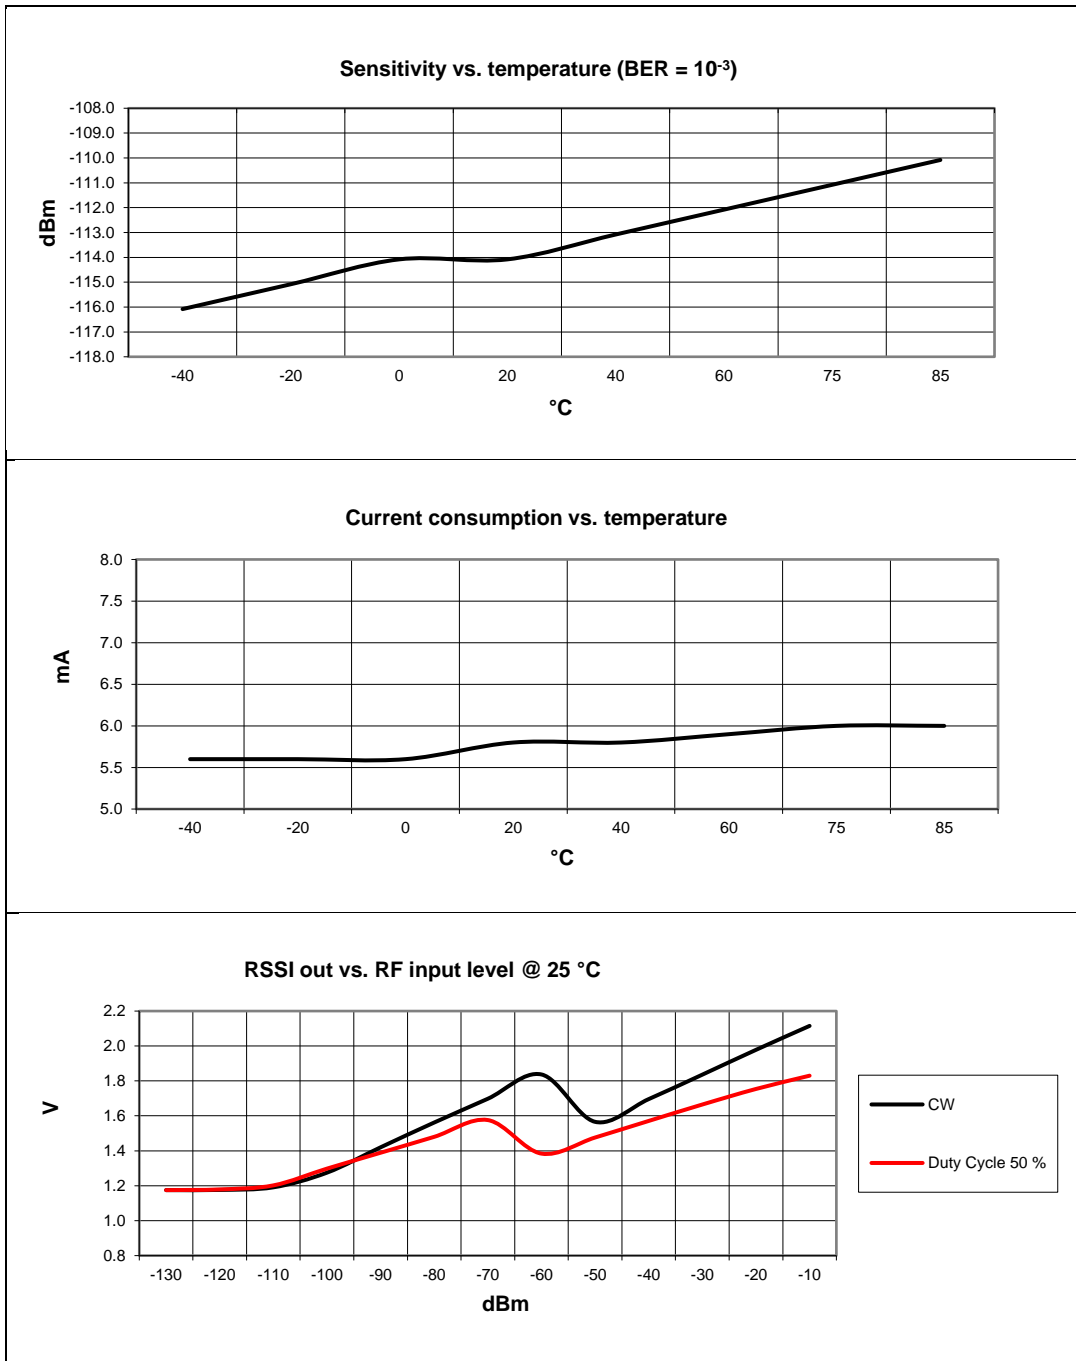

## 6 Application Notes

Title	Description	Doc
Frame Structure for Radio Communication	Description on data encoding techniques	AN_RF_001.pdf
PCB Layout Guidelines	Hints how to make for a good RF design	AN_RF_002.pdf

## 7 Regulatory Approvals

Doc	Title	Description
32001520_DoC.pdf	Declaration of Conformity	Declaration of the conformity with the essential requirements of the European Directive 2014/53/EU

## 8 Revision History

Revision	Date	Description
0.1	29.10.2021	First release
0.2	27.05.2022	Template change